


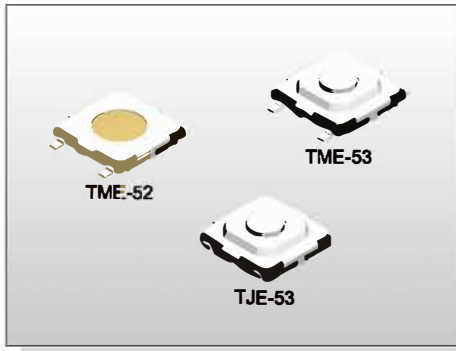

FEATURES

- ※Compact-sized 5.2x5.2mm
- ※Long operating life
- ※With ground terminal


APPLICATION

- ※Smart phone
- ※Digital camera, Medical
- ※Portable electronic device


SPECIFICATION

Contact Rating	50mA, 12V DC
Contact Resistance	100mΩ max.
Insulation Resistance	100MΩ min. 500V DC
Dielectric Strength	250V AC/1 minute
Operating Force	70±50gf/100±50gf/160±50gf 260±50gf
Travel	0.25mm
Operating Life	200,000 cycles for 260gf 1,000,000 cycles for 160/100/70gf
Operating Temp.	-25°C ~ +70°C
Storage Temp.	-30°C ~ +80°C

HOW TO ORDER

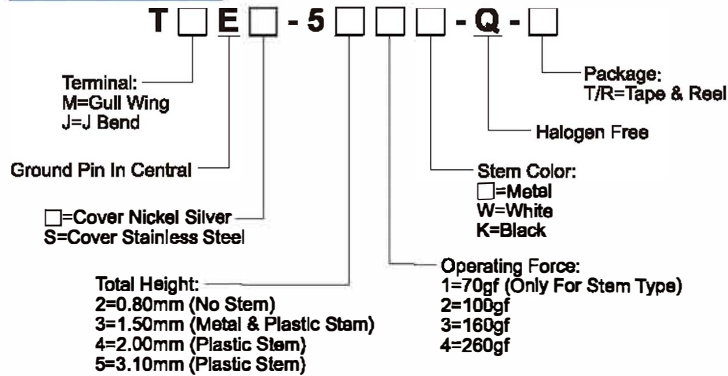

CIRCUIT


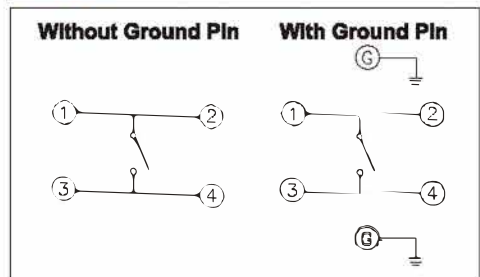


PACKAGE

<Tape & Reel>



- T E-52, 53=4000 pcs
- T E-54=3000 pcs
- T E-55=2000 pcs

TME-5

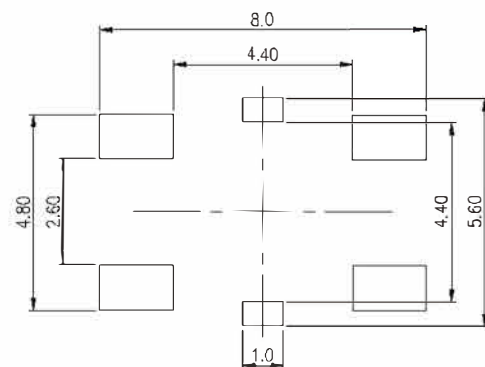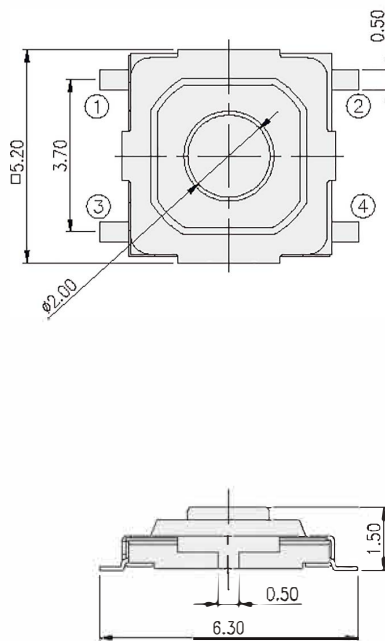

P.C.B. LAYOUT



TJE-53

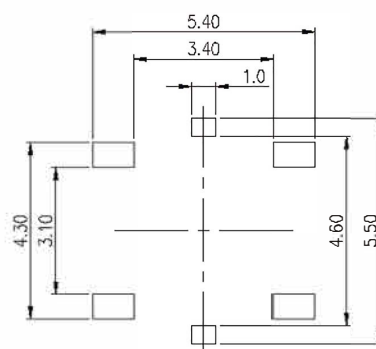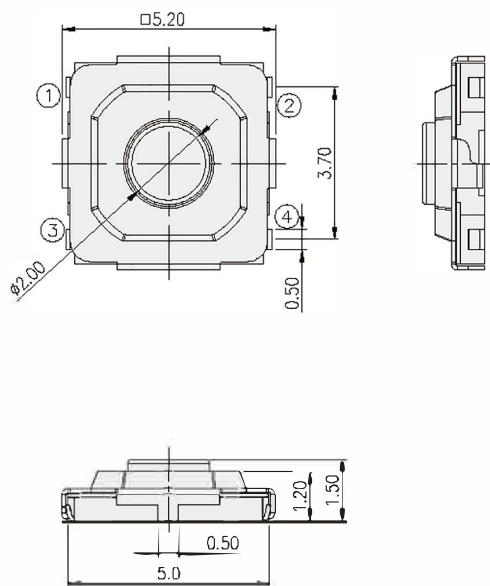

P.C.B. LAYOUT

TACT SWITCH

TME-52

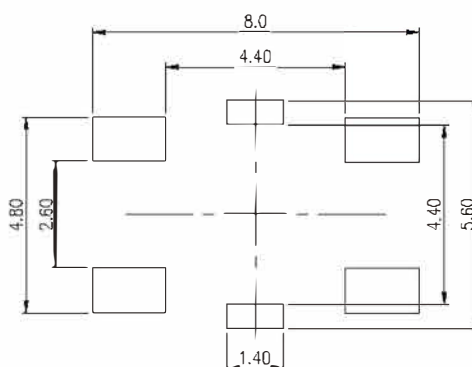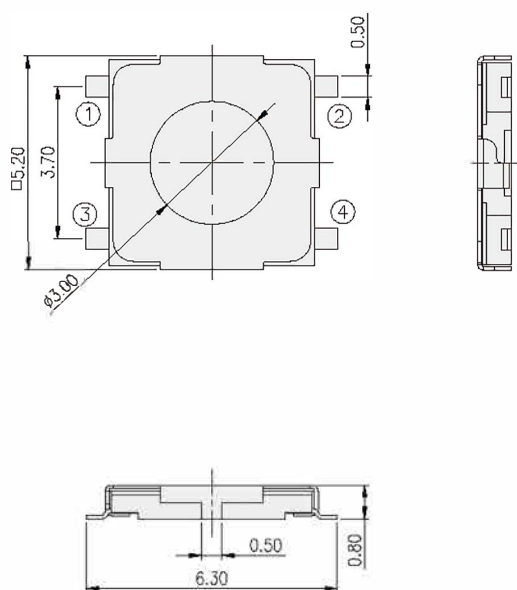

P.C.B. LAYOUT