



### ► Specification

**RATING:** 2A/36VDC  
**MECHANICAL Life:** 100000 cycles  
**INSULATION RESISTANCE:** 100 MΩmin at 500VDC  
**CONTACT RESISTANCE:** 50 MΩ max  
**OPERATION TEMPERATURE :** -20°C~ 55°C  
**TRAVEL:** 1.8+/-0.1mm  
**OPERATION PRESSURE:** 2~4N  
**INGRESS PROTECTION:** IP65, Ik08



### ► Part Number

Series  
MPB12 -



Button type


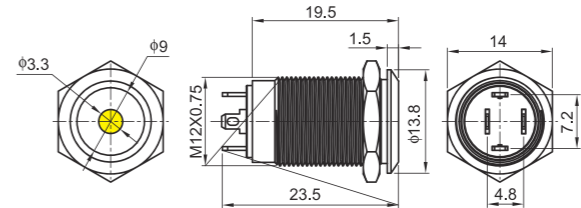


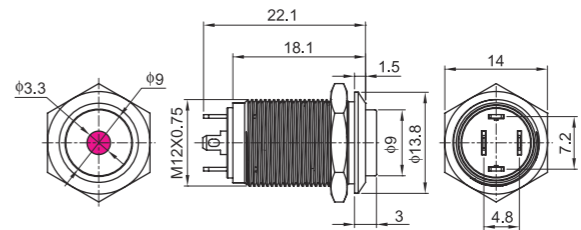


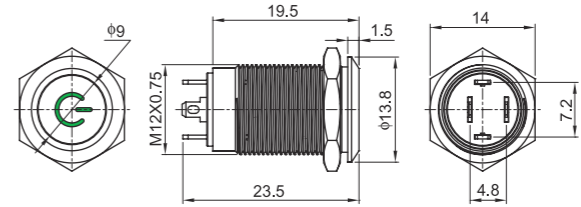


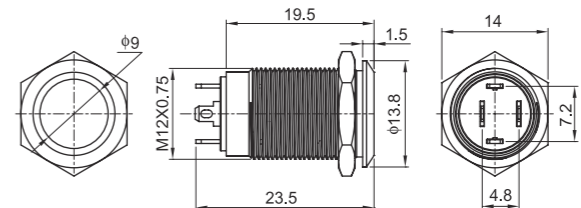


G3(Flat with Spot LED)  
 G5(Flat with Power logo LED)  
 G6(Flat without LED)  
 G7(High without LED)



Other Number

...  
 ...

### ► Diagram

NO.	Dimensions	Circuit
 MPB12-G3		
 MPB12-G4		
 MPB12-G5		
 MPB12-G6		
 MPB12-G7	