








RT-C14A-A1



SPECIFICATION

Rating	10A250VAC 15A250VAC
Contact resistance	50m Ω Max
Insulation resistance	100M Ω (Min)500VDC
Dielectric Strength	2000VAC 0.5mA 1minutes
Life expectancy	5000 Cycles






RT-D001

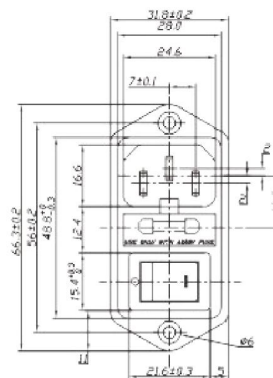

SPECIFICATION


Rating	10A250VAC
Contact resistance	50m Ω Max
Insulation resistance	100M Ω (Min)500VDC
Dielectric Strength	2000VAC 0.5mA 1minutes
Life expectancy	5000 Cycles

RT-C08



SPECIFICATION

Rating	10A250VAC 15A250VAC
Contact resistance	50m Ω Max
Insulation resistance	100M Ω (Min)500VDC
Dielectric Strength	2000VAC 0.5mA 1minutes
Life expectancy	5000 Cycles



寸法 (mm)	寸法 (mm)
1.0	1.0
1.5	1.5
2.0	2.0