


► Product Features

- 1P2T, 1P3T, 1P4T available
- Multiple length of stem
- RoHS Compliant




► Materials

Part Name	Base	Cover	Stem	Contact	Terminal
Material	PA6T	SUS Ag plated	PA66	Beryllium Copper Ag plated	Phosphor bronze Ag plated

► Specification

Operating Force	200gf ±120gf
Operating Temperature Range	-20°C ~ 70°C
Voltage Rating	500mA, 36VDC
Travel	2.0mm
Actuation Life Cycle	10,000 times
Insulation Resistance	100MΩ min @ 250VDC
Dielectric Strength	250VAC for 1 minute
Contact Resistance	100mΩ Max

► Part Number

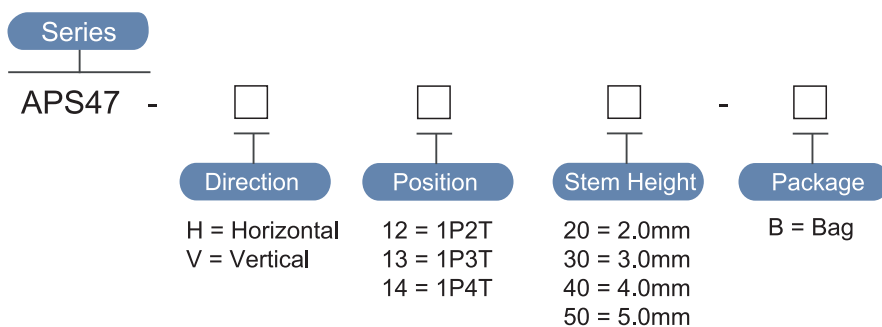

► Diagram

NO.	Dimensions	Circuit
APS47-H12xx		